

Mark Scheme (Results)

January 2016

Pearson Edexcel
International Advanced Level
in Physics (WPH01)

Paper 01 – Physics on the Go

Edexcel and BTEC Qualifications

Edexcel and BTEC qualifications come from Pearson, the world's leading learning company. We provide a wide range of qualifications including academic, vocational, occupational and specific programmes for employers. For further information, please visit our website at www.edexcel.com.

Our website subject pages hold useful resources, support material and live feeds from our subject advisors giving you access to a portal of information. If you have any subject specific questions about this specification that require the help of a subject specialist, you may find our Ask The Expert email service helpful.

www.edexcel.com/contactus

Pearson: helping people progress, everywhere

Our aim is to help everyone progress in their lives through education. We believe in every kind of learning, for all kinds of people, wherever they are in the world. We've been involved in education for over 150 years, and by working across 70 countries, in 100 languages, we have built an international reputation for our commitment to high standards and raising achievement through innovation in education. Find out more about how we can help you and your students at:

www.pearson.com/uk

January 2016

Publications Code IA043307*

All the material in this publication is copyright

© Pearson Education Ltd 2016

General Marking Guidance

- All candidates must receive the same treatment. Examiners must mark the first candidate in exactly the same way as they mark the last.
- Mark schemes should be applied positively. Candidates must be rewarded for what they have shown they can do rather than penalised for omissions.
- Examiners should mark according to the mark scheme not according to their perception of where the grade boundaries may lie.
- There is no ceiling on achievement. All marks on the mark scheme should be used appropriately.
- All the marks on the mark scheme are designed to be awarded. Examiners should always award full marks if deserved, i.e. if the answer matches the mark scheme. Examiners should also be prepared to award zero marks if the candidate's response is not worthy of credit according to the mark scheme.
- Where some judgement is required, mark schemes will provide the principles by which marks will be awarded and exemplification may be limited.
- When examiners are in doubt regarding the application of the mark scheme to a candidate's response, the team leader must be consulted.
- Crossed out work should be marked UNLESS the candidate has replaced it with an alternative response.

Mark scheme notes

Underlying principle

The mark scheme will clearly indicate the concept that is being rewarded, backed up by examples. It is not a set of model answers.

For example:

(iii) Horizontal force of hinge on table top

66.3 (N) or 66 (N) **and** correct indication of direction [no ue] ✓ 1
[Some examples of direction: acting from right (to left) / to the left / West / opposite direction to horizontal. May show direction by arrow. Do not accept a minus sign in front of number as direction.]

This has a clear statement of the principle for awarding the mark, supported by some examples illustrating acceptable boundaries.

1. Mark scheme format

- 1.1 You will not see 'wtte' (words to that effect). Alternative correct wording should be credited in every answer unless the ms has specified specific words that must be present. Such words will be indicated by underlining e.g. 'resonance'
- 1.2 Bold lower case will be used for emphasis.
- 1.3 Round brackets () indicate words that are not essential e.g. "(hence) distance is increased".
- 1.4 Square brackets [] indicate advice to examiners or examples e.g. [Do not accept gravity] [ecf].

2. Unit error penalties

- 2.1 A separate mark is not usually given for a unit but a missing or incorrect unit will normally mean that the final calculation mark will not be awarded.
- 2.2 Incorrect use of case e.g. 'Watt' or 'w' will **not** be penalised.
- 2.3 There will be no unit penalty applied in 'show that' questions or in any other question where the units to be used have been given, for example in a spreadsheet.
- 2.4 The same missing or incorrect unit will not be penalised more than once within one question (one clip in epen).
- 2.5 Occasionally, it may be decided not to penalise a missing or incorrect unit e.g. the candidate may be calculating the gradient of a graph, resulting in a unit that is not one that should be known and is complex.
- 2.6 The mark scheme will indicate if no unit error penalty is to be applied by means of [no ue].

3. Significant figures

- 3.1 Use of an inappropriate number of significant figures in the theory papers will normally only be penalised in 'show that' questions where use of too few significant figures has resulted in the candidate not demonstrating the validity of the given answer.
- 3.2 The use of $g = 10 \text{ m s}^{-2}$ or 10 N kg^{-1} instead of 9.81 m s^{-2} or 9.81 N kg^{-1} will be penalised by one mark (but not more than once per clip). Accept 9.8 m s^{-2} or 9.8 N kg^{-1}

4. Calculations

- 4.1 Bald (i.e. no working shown) correct answers score full marks unless in a 'show that' question.
- 4.2 If a 'show that' question is worth 2 marks then both marks will be available for a reverse working; if it is worth 3 marks then only 2 will be available.
- 4.3 **use** of the formula means that the candidate demonstrates substitution of physically correct values, although there may be conversion errors e.g. power of 10 error.
- 4.4 **recall** of the correct formula will be awarded when the formula is seen or implied by substitution.
- 4.5 The mark scheme will show a correctly worked answer for illustration only.
- 4.6 Example of mark scheme for a calculation:

'Show that' calculation of weight

Use of $L \times W \times H$ ✓

Substitution into density equation with a volume and density ✓

Correct answer [49.4 (N)] to at least 3 sig fig. [No ue] ✓
[If 5040 g rounded to 5000 g or 5 kg, do not give 3rd mark; if conversion to kg is omitted and then answer fudged, do not give 3rd mark]
[Bald answer scores 0, reverse calculation 2/3]

3

Example of answer:

$$80 \text{ cm} \times 50 \text{ cm} \times 1.8 \text{ cm} = 7200 \text{ cm}^3$$

$$7200 \text{ cm}^3 \times 0.70 \text{ g cm}^{-3} = 5040 \text{ g}$$

$$5040 \times 10^{-3} \text{ kg} \times 9.81 \text{ N/kg}$$

$$= 49.4 \text{ N}$$

5. Quality of Written Communication

- 5.1 Indicated by QoWC in mark scheme. QWC – Work must be clear and organised in a logical manner using technical wording where appropriate.
- 5.2 Usually it is part of a max mark, the final mark not being awarded unless the QoWC condition has been satisfied.

6. Graphs

- 6.1 A mark given for axes requires both axes to be labelled with quantities and units, and drawn the correct way round.
- 6.2 Sometimes a separate mark will be given for units or for each axis if the units are complex. This will be indicated on the mark scheme.
- 6.3 A mark given for choosing a scale requires that the chosen scale allows all points to be plotted, spreads plotted points over more than half of each axis and is not an awkward scale e.g. multiples of 3, 7 etc.
- 6.4 Points should be plotted to within 1 mm.
 - Check the two points furthest from the best line. If both OK award mark.
 - If either is 2 mm out do not award mark.
 - If both are 1 mm out do not award mark.
 - If either is 1 mm out then check another two and award mark if both of these OK, otherwise no mark.

For a line mark there must be a thin continuous line which is the best-fit line for the candidate's results.

Question Number	Answer	Mark
1	C	1
2	C	1
3	C	1
4	B	1
5	D	1
6	D	1
7	D	1
8	C	1
9	A	1
10	B	1

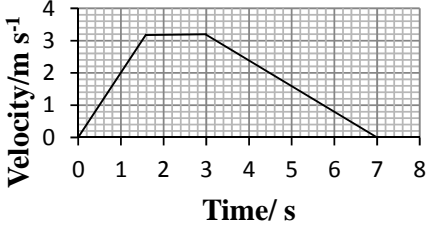
Question Number	Answer	Mark
11(a)	<p>work done = energy transferred</p> <p>Or Work done (against gravity) is equal to the (gain in) gravitational potential energy (1)</p> <p>The distance moved is the height the box is raised by and the force to be used must be equal to the weight</p> <p>Or</p> <p>$\Delta h = \Delta s$ and $F = mg$ (1)</p>	2
11(b)	<p>Use of $\Delta E_{\text{grav}} = mg\Delta h$ (1)</p> <p>$\Delta E_{\text{grav}} = 74 \text{ J}$ (1)</p> <p><u>Example of calculation</u></p> <p>$\Delta E_{\text{grav}} = 5.0 \text{ kg} \times 9.81 \text{ N kg}^{-1} \times 1.5 \text{ m}$</p> <p>$\Delta E_{\text{grav}} = 73.6 \text{ J}$</p>	2
Total for Question 11		4

Question Number	Answer	Mark
12(a)	$mg = ma$ either leading to $a = g$ or a statement that the masses cancel (1) <u>Example of answer</u> $F = ma$ and $W = mg$ $mg = ma$ $a = g$	1
12(b)(i)	$s = \frac{1}{2}at^2$ Or $a = \frac{2s}{t^2}$ Or $s = ut + \frac{1}{2}at^2$ and $u = 0$ (1) (allow g for a and h for s)	1
12(b)(ii)	Either Parallax(in measuring s) Or the ruler was not vertical/perpendicular (1) Giving a larger value for s (than the actual value) (1) Or The frame rate was incorrect Or the idea that the initial velocity of the ball was not zero (1) Giving a lower value for the measured time (1) <u>Examples</u> The ball was dropped before the camera started recording or the ball was dropped before the first frame or the ball was dropped from above the ruler. (Do not accept ball was thrown)	2
Total for Question 12		4

Question Number	Answer	Mark
13(a)(i)	<u>Stress</u> needed to fracture/break (do not accept a definition of strong)	(1) 1
13(a)(ii)	Resistance to indentation/scratching Or resistance to plastic deformation of the surface	(1) 1
13(b)	<p>Max 4</p> <p>(Brass is) strong Or high breaking stress (accept high breaking force) Or breaking stress is much greater than 10 MPa. (1)</p> <p>so the <u>key</u> will not break (1) (Conditional on MP1)</p> <p>(10MPa/stress) is below the elastic limit Or the elastic limit is at about 300(± 50) MPa Or the plastic deformation starts at about 300(± 50) MPa (1)</p> <p>The <u>key</u> would keep its shape (when the force is removed) Or the <u>key</u> would not plastically deform Or any deformation of the <u>key</u> would be elastic (1) (Conditional on MP3)</p> <p>Stiff Or high Young's modulus (1)</p> <p>The <u>key</u> would not change shape (as it is being used) (Conditional on MP5) (1)</p> <p>(ignore references to tough and limit of proportionality and accept yield point for elastic limit)</p>	4
Total for Question 13		6

Question Number	Answer	Mark
*14	<p>(QWC – work must be clear and organised in a logical manner using technical terminology where appropriate)</p> <p>New design: is more streamlined Or more curved Or more aerodynamic (1)</p> <p>reduces turbulent air flow Or fewer eddy currents Or increases laminar air flow (1)</p> <p>less (air) resistance/drag/friction (1)</p> <p>less energy transferred to the air (from the lorry) Or less work done against (air)resistance Or less power/energy/work needs to be supplied to the lorry (to maintain the same speed) (1)</p> <p>Allow converse argument for references to the traditional trailer.</p>	4
	Total for Question 14	4

Question Number	Answer	Mark
15(a)	See stress = $\frac{N}{m^2}$ Or stress = $N m^{-2}$ (1) See strain = $\frac{m}{m}$ (1)	2
15(b)(i)	see $\sigma = \frac{50}{7.0(\times 10^{-2}) \times 7.0(\times 10^{-2})}$ (1) Or see $E = \frac{Fx}{A\Delta x}$ see $\varepsilon = \frac{2.0(\times 10^{-2})}{7.0(\times 10^{-2})}$ (1) Or substitution into $E = \frac{Fx}{A\Delta x}$ with $\Delta x = 2 (\times 10^{-2} m)$ (1) $E = (3.5 \text{ or } 3.6) \times 10^4 \text{ Pa}$ (1) <u>Example of calculation</u> $\sigma = \frac{50 \text{ N}}{(0.070 \text{ m})^2} = 10\,204 \text{ Pa}$ $\varepsilon = \frac{0.020 \text{ m}}{0.070 \text{ m}} = 0.286$ $E = \frac{10\,204 \text{ Pa}}{0.286} = 35\,678 \text{ Pa}$	3
15(b)(ii)	The (cross sectional) area would get bigger (do not allow surface area) (1) Effect: This would give a smaller value for the Young modulus Or the value already calculated is too large. (1) (If the candidate just states ‘YM will get smaller’ without any justification, do not award any marks) (MP2 only for (cross sectional) area gets smaller leading to increase in Young modulus)	2
Total for Question 15		7

Question Number	Answer	Mark
16(a)	<p>Use of $v = u + at$ Or use of area under the graph (for either area) (1) $v = 3.2 \text{ (m s}^{-1}\text{)}$ (1)</p> <p><u>Example of calculation</u> $v = 0 + (2 \text{ m s}^{-2} \times 1.6 \text{ s})$ $v = 3.2 \text{ m s}^{-1}$</p>	2
16(b)	<p>Diagonal line from 0 to 3.2 m s^{-1} over first 1.6 s (1) (allow show that value or candidate's values for v and t from (a))</p> <p>Region of constant, non-zero velocity (from 1.6 s to 3 s) (1)</p> <p>Deceleration from candidate's maximum positive velocity to 0 over last 4 s (1)</p> 	3
16(c)	<p>Use of area under their graph in (b) Or use of correct equation(s) of motion (1)</p> <p>Correct values substituted into a method for calculating the area under their graph e.g. trapezium method $3.2 \times \frac{1.4+7}{2}$ (1)</p> <p>$s = 13 \text{ m}$ (Full ecf from (b)) (1)</p> <p>($s = 12.6 \text{ m}$ using the show that value of 3 m s^{-1} for max velocity)</p> <p><u>Example of calculation</u> $s = (\frac{1}{2} \times 3.2 \text{ m s}^{-1} \times 1.6 \text{ s}) + (3.2 \text{ m s}^{-1} \times 1.4 \text{ s}) + (\frac{1}{2} \times 3.2 \text{ m s}^{-1} \times 4 \text{ s})$ $s = 2.56 + 4.48 + 6.4 = 13.4 \text{ m}$</p>	3
16(d)(i)	<p>Use of $E_k = \frac{1}{2} mv^2$ (1) $E_k = 0.61 \text{ J}$ (ecf for velocity from (a)) (1)</p> <p>(Show that value gives 0.54 J)</p> <p><u>Example of calculation</u> $E_k = \frac{1}{2} \times 0.12 \text{ kg} \times (3.2 \text{ m s}^{-1})^2$ $E_k = 0.61 \text{ J}$</p>	2
16(d)(ii)	<p>Use of power = energy/time (1) $P = 0.38 \text{ W}$ (ecf from (d)(i)) (1)</p> <p>($P = 0.34 \text{ W}$ using the show that value of $v = 3 \text{ m s}^{-1}$)</p> <p><u>Example of calculation</u> $P = \frac{0.61 \text{ J}}{1.6 \text{ s}}$ $P = 0.38 \text{ W}$</p>	2
Total for Question 16		12

Question Number	Answer	Mark
17(a)(i)	(For upward motion) the upthrust > weight (+drag) (1) Or there is a resultant upward force	3
	(This is because) greater volume/mass of liquid is displaced (1) (Accept more liquid displaced)	
	Upthrust increases (and mass/weight of wax drop is constant) (1)	
17(a)(ii)	<u>Upthrust</u> , weight and (viscous) drag identified as the three forces (1)	2
	Correct equation e.g. upthrust = weight + drag Or upthrust – weight –drag = 0 (1)	
	(Max 1 for undefined symbols used)	
17(b)	Either	3
	Temperature decreases (1)	
	Density of drop increases (1)	
	Upthrust reduces (1)	
	Or	
	Temperature decreases (1)	
Viscosity (of clear liquid) greater (1)		
Drag will be greater (at the top) (1)		
Total for question 17		8

Question Number	Answer	Mark
18(a)(i)	So that it can store/transfer elastic/strain (potential) energy Or to produce a (restoring) force on the arm (accept pull for force i.e. 'pull arm up')	(1) 1
18(a)(ii)	Elastic/strain (potential) energy $\rightarrow E_{\text{grav}}$ +/and E_k (+/and thermal energy)	(1) 1
*18(b)(i)	(QWC – work must be clear and organised in a logical manner using technical terminology where appropriate) Either (the greater the angle) the greater the energy (stored) (1) greater kinetic energy (transferred to projectile/arm) (1) greater (initial) (horizontal) velocity of the projectile (1) $s = ut$ linked to a greater range (1) Or the greater the angle the greater the force/stress/tension (1) the greater the acceleration (of the arm/projectile) (1) greater (initial) (horizontal) velocity of the projectile (1) $s = ut$ linked to a greater range (1) (Accept symbols for words)	4
18(b)(ii)	Increases acceleration Or increases (initial) velocity (of the projectile)	(1) 1

18(b)(iii)	<p>One modification (1) One reason (1) (Modification and reason must be linked for both marks to be awarded)</p> <table border="1" data-bbox="435 216 1258 695"> <thead> <tr> <th data-bbox="435 216 846 247">Modification</th> <th data-bbox="846 216 1258 247">Reason</th> </tr> </thead> <tbody> <tr> <td data-bbox="435 247 846 373">Double up or increase number of bands</td> <td data-bbox="846 247 1258 373">Would increase the force/tension Or would increase energy (stored) Or would increase the work done</td> </tr> <tr> <td data-bbox="435 373 846 499">Replace with bands that are: stiffer or shorter or wider or have greater k (not smaller)</td> <td data-bbox="846 373 1258 499">Would increase the force/tension Or would increase energy (stored) Or would increase the work done</td> </tr> <tr> <td data-bbox="435 499 846 594">Use a longer arm or raise the device to a greater height</td> <td data-bbox="846 499 1258 594">Greater (vertical) distance to fall</td> </tr> <tr> <td data-bbox="435 594 846 695">Tilt the model or cross bar</td> <td data-bbox="846 594 1258 695">Projectile launched with an upwards component of velocity or at an angle</td> </tr> </tbody> </table>	Modification	Reason	Double up or increase number of bands	Would increase the force/tension Or would increase energy (stored) Or would increase the work done	Replace with bands that are: stiffer or shorter or wider or have greater k (not smaller)	Would increase the force/tension Or would increase energy (stored) Or would increase the work done	Use a longer arm or raise the device to a greater height	Greater (vertical) distance to fall	Tilt the model or cross bar	Projectile launched with an upwards component of velocity or at an angle	(1) (1)	2
Modification	Reason												
Double up or increase number of bands	Would increase the force/tension Or would increase energy (stored) Or would increase the work done												
Replace with bands that are: stiffer or shorter or wider or have greater k (not smaller)	Would increase the force/tension Or would increase energy (stored) Or would increase the work done												
Use a longer arm or raise the device to a greater height	Greater (vertical) distance to fall												
Tilt the model or cross bar	Projectile launched with an upwards component of velocity or at an angle												
18(c)(i)	<p>Use of $s = ut + \frac{1}{2} at^2$ (1) $t = 0.13$ (s) (1)</p> <p><u>Example of calculation</u> $0.08 \text{ m} = \frac{1}{2} \times 9.81 \text{ m s}^{-2} \times t^2$ $t = 0.128 \text{ s}$</p>	(1) (1)	2										
18(c)(ii)	<p>Use of $v = s/t$ to calculate horizontal speed Or see $10.6 \text{ (m s}^{-1}\text{)}$ (1) Use of $s = 10.6 \times t$ (1) $s = 1.4 \text{ m}$ ecf for time from (i) (1)</p> <p>(using show that value $s = 1.06 \text{ m}$)</p> <p><u>Example of calculation</u> $u_{\text{horizontal}} = \frac{1.70 \text{ m}}{0.16 \text{ s}} = 10.6 \text{ m s}^{-1}$ $s = 10.6 \text{ m s}^{-1} \times 0.13 \text{ s}$ $s = 1.38 \text{ m}$</p>	(1) (1) (1)	3										
Total for question 18			14										

Question Number	Answer	Mark
19(a)(i)	Use of $v^2 = u^2 + 2as$ (1) $a = 2.9 \text{ (m s}^{-2}\text{)}$ (1) <u>Example of calculation</u> $a = \frac{(15 \text{ m s}^{-1})^2 - (0 \text{ m s}^{-1})^2}{2 \times 39 \text{ m}}$ $a = 2.88 \text{ m s}^{-2}$	2
19(a)(ii)	Use of $F = ma$ to find a or F (1) Maximum $a = 3.2 \text{ m s}^{-2}$ Or Force in (a)(i) $F = 580 \text{ N (or } 600 \text{ N)}$ (1) (3.2 m s^{-2} is the maximum acceleration because) the box must have the same acceleration as the lorry (1) <u>Example of calculation</u> $a = 630\text{N}/200 \text{ kg}$ $a = 3.15 \text{ m s}^{-2}$	3
19(b)(i)	$W_{\text{parallel}} = W\sin\theta$ (1) $W_{\text{perpendicular}} = W\cos\theta$ (1) (Accept mg , $200g$ or 1962 for W)	2
19(b)(ii)	$F = W\sin\theta$ Or $F = W_{\text{parallel}}$ Or $R = W\cos\theta$ Or $R = W_{\text{perpendicular}}$ (1) Substitute $F = 0.32R$ into candidate's equation for F or R (1) Use of $\sin\theta/\cos\theta = \tan\theta$ (1) $\theta = 18^\circ$ (1)	4
	Total for question 19	11

